

# ATTACHMENTS

# A-Z

**minute MOUNT attachments**



3000  
4100  
4200

## AERATOR EB480

The Ventrac EB480 Aerator is capable of being three Aerators. Simply choose one of the three types of aeration tines, Core, Fracture or Slicer. Either change each tine individually or simply change the two mounting heads for a fast easy change over in a matter of minutes.



Optional Weights & Tines

Overall Width ..... 54"  
Overall Height ..... 18.375"  
Overall Length ..... 23.5"  
Working Width ..... 48"  
Aeration Density ..... 6 holes per f<sup>2</sup>



4100  
4200

## AERA-VATOR EA600

Overall Width ..... 66"  
Overall Height ..... 22"  
Overall Length ..... 33"  
Working Width ..... 60"  
Tines ..... 96 (0.5625 x 3.5")  
Weight ..... 350 lbs  
Side to Side Tine Travel ..... 1.25"  
Vibrating Depth ..... 3.75 inches  
Tine Vibration Frequency... 3000 RPM  
=est. 800 cyc/min  
Aeration Density ..... 6 holes per f<sup>2</sup>

\*Pictured with optional seedbox

The AERA-vator is designed to fracture the soil beneath the sod without destroying the turf on the surface. This means that turf is ready for use immediately after treatment. Penetrating

the soil with no slicing or cutting action, preserves delicate turf grass roots and stimulates future growth.

**Optional:** Seedbox allows for over-seeding and aerating simultaneously.

## BLADES



3N  
Attachment

The Dozer Blade is hydraulically angled left and right. Adjustable skid shoes, removable locking pin, and reversible cutting edge are standard.

**Optional:** Polyurethane cutting edge.

	KD480	KD600	KD720
Width	48"	60"	72"
Height	21.75"	21.75"	21.75"
Angle (right or left)	30°	30°	30°
Weight	164 lbs	214 lbs	230 lbs

3000  
4100  
4200



4100  
4200

## BLOWERS

### KA160 BLOWER (4000 SERIES)

The KA160 Power Blower rotates 180° horizontally left and right with a standard hydraulic motor controlled from the operator seat.

#### KA160 (4000 SERIES)

Overall Width ..... 32"  
Overall Height ..... 21"  
Overall Length ..... 38"  
Fan ..... 16 BLADE  
Wind speed ..... 180 MPH  
Volume ..... 4000 CFM  
Weight (appx) ..... 150 lbs  
Hydraulic Motor ..... Standard



3000

### LA160 BLOWER (3000 SERIES)

#### LA160 (3000 SERIES)

Overall Width ..... 28"  
Overall Height ..... 22"  
Overall Length ..... 43"  
Fan ..... 16 BLADE  
Wind speed ..... 160 MPH  
Volume ..... 3400 CFM  
Weight (appx) ..... 92 lbs  
Hydraulic Motor ..... **Optional**

The LA160 Blower can be manually angled 180 degrees.

**Optional:** Hydraulic motor for angle rotation.

## BROOMS

### HB580 BROOM (4000 SERIES)

The HB580 broom is hydraulically driven and can be angled left or right using the Auxiliary SDLA lever.

**Optional:** Actuator which allows the operator to slow or reverse the rotation of the bristles from the operator's seat.



4100  
4200

#### HB580 (4000 SERIES)

Overall Width ..... 68"  
Overall Height ..... 23"  
Overall Length ..... 53"  
Broom Width ..... 58"  
Broom Speed ..... 220 RPM\*  
Weight ..... 380 lbs  
Gauge Wheels ..... Standard

\*Engine Speed 3200 RPM



Optional Outtrigger Wheels

3000

### LB540 BROOM (3000 SERIES)

#### LB540 (3000 SERIES)

Broom Width ..... 54"  
Overall Width ..... 57"  
Overall Height ..... 17"  
Overall Length ..... 46"  
Broom Diameter ..... 16"  
Broom Speed ..... 300 @ 3200 RPM  
Weight ..... 205 lbs  
Gauge Wheels ..... Standard

\*Engine Speed 3200 RPM

The LB broom is hydraulically angled left or right using the Auxiliary lever.


**Optional:** Outtrigger wheels for thatching your yard.



3000  
4100  
4200

## EDGER ED200

Overall Width ..... 54-66"  
Overall Height ..... 27"  
Overall Length ..... 45"  
Weight w/ Blower ..... 222 lbs  
Disc Diameter ..... 20"  
Cutting Depth ..... 6"



**Optional:** Weights & Blower\* for removing edged debris.

\*Blower attaches only to 4000 series.

The ED200 Edger is designed to edge sidewalks, curbs, cart paths, etc. The edging disc can be reversed for shaping garden and flower beds.

## EXCAVATORS



3000  
4100  
4200

	HJ300	HJ480
Overall Width	36"	52.5"
Working Width	30"	48"
Height	11.5"	11.5"
Length	32"	32"
Capacity	3.6 f <sup>3</sup>	5 f <sup>3</sup>
Ground Clearance	11"	11"
Weight	144 lbs	180 lbs

HJ Excavator buckets allow the operator to excavate, dig, and haul material. Its innovative flip back design allows for forward or reverse excavating.



3000

## FIELD MOWER LQ450

\* Pictured with Tree Shield Kit

Cutting Width ..... 45"  
Cutting Height ..... 2.25", 3.5", 4.75"  
Height ..... 16"  
Length ..... 53"  
Weight ..... 245 lbs  
Overall Length w/ Ventrac ..... 118"

The LQ450 Field Mower is designed to cut heavy grass and small brush growth with three different height settings. Two counter-rotating blades discharge grass

to the center rear.

**Optional:** Tree Shield Kit with branch lifters and wheel covers for Tree Farms (rear weights recommended).

## GENERATOR HG150



4100  
4200

Maximum Watts ..... 15,000  
Continuous Watts ..... 12,000  
Voltage ..... 120/240  
Amperage ..... 100/50  
Hertz ..... 60  
Phase ..... 1  
Req Constant Shaft Speed ... 3,000 RPM  
Net weight ..... 196 pounds

The HG150 is great for mobile power or as a standby unit. Receptacles include: (4) 120v, 20A Receptacles,

(1) 120v, 30A Twistlock, (1) 240v, 30A Twistlock, (1) 240v 50A Range Receptacle.

## MOWERS

### HM & HP SERIES FINISH MOWERS (4000 SERIES)

4100  
4200

All Ventrac finish mowers (HM, HP, LM) feature single lever height adjustment, easy **flip-up deck design**, and rear roller for maximum lawn striping.

The HP offset mower shifts the mowing deck 7" to the left for a shorter cutting radius and increased stability for mowing around ponds or ditches.

**Optional:** Mulching Kit.



4000 SERIES	HM602	HM722	HP722 (offset deck)
Width of Cut	60"	72"	72"
Cutting Height	1.125-4.75"	1.125-4.75"	1.125-4.75"
Length	52"	58"	58"
Weight (appx)	385 lbs	450 lbs	450 lbs

### LM SERIES FINISH MOWERS (3000 SERIES)



Easy Height Adjustment



All Ventrac Mowers feature a flip up deck design. No tools needed.

3000 SERIES	LM440	LM520	LM600
Width of Cut	44"	52"	60"
Cutting Height	1.5-4"	1.5-4"	1.5-4"
Length	41"	43"	45"
Weight (appx)	238 lbs	268 lbs	315 lbs

## POWER RAKE KP540



4100  
4200

Overall Height ..... 38"  
Overall Width ..... 61"  
Overall Length ..... 62"  
Rotor Width ..... 54"  
Height Adjustment ..... 1/8" increments  
Height Adjustment Range ..... 4"  
Weight ..... 520 lbs

The Power Rake pulverizes, levels, grades, and prepares seed beds with 72 replaceable carbide tips. The rotor

is both driven & angled hydraulically. Rotation can be changed from the operators seat.

## SLIP SCOOPS



3000  
4100  
4200

	HE300	HE480
Overall Width	34.5"	52.5"
Working Width	30"	48"
Height	15"	15"
Length	32"	32"
Weight	130 lbs	170 lbs
Capacity	3.6 f <sup>3</sup>	6 f <sup>3</sup>

Ventrac Slip Scoops are a must have attachment allowing you to dig, level, and move a variety of materials.



# Giving you a WORLD of opportunities.

# 3N Attachments

Attachments with this symbol can also be mounted to the rear using Ventrac's optional 3-point hitch and 3-N-1 Adapter.

## SNOW BLOWERS

### KX520 SNOW BLOWER (4000 SERIES)

KX520 (4000 SERIES)	
Width .....	52"
Height .....	58.5"
Depth .....	43.75"
Cutting Height .....	26.5"
Cutting Width .....	48"
Blowing Distance ... Up to 50 ft	
Chute Rotation .....	220°
Weight .....	440 lbs

4100  
4200

With a serrated auger, the KX and LX snowblowers cut into light or hard packed snow with ease. Chute is rotated hydraulically 220° left & right.

**Optional:** Actuator allows the operator to change the height of throw from the seat.

### LX420 SNOW BLOWER (3000 SERIES)

LX420 (3000 SERIES)	
Width .....	42"
Height .....	52.5"
Length .....	43"
Throwing Distance .....	Up to 40 ft.
Chute Rotation .....	220°
Weight .....	360 lbs

3000

## STUMP GRINDERS

### KC180 STUMP GRINDER (4000 SERIES)

KC180 (4000 SERIES)	
Overall Height .....	19"
Overall Width .....	27"
Overall Length .....	33"
Cutterhead Width .....	3.5"
Overall Cutterhead Diameter .....	18"
Cutterhead Speed .....	900 RPM*
Cutting Depth Below Ground Level .....	6"
Weight .....	170 lbs

\*Engine Speed 3600 RPM

4100  
4200

The KC180 stump grinder features 18 replaceable carbide cutting teeth for large or small stump removal. Standard

front mounted mirror allows the operator to see the stump easily while being fully protected from debris.

### LC150 STUMP GRINDER (3000 SERIES)

LC150 (3000 SERIES)	
Overall Height .....	19.5"
Overall Width .....	21"
Overall Length .....	40"
Rotor Tip Speed .....	2,475 ft./min*
Rotor RPM .....	620 RPM*
Cutting Depth Below Ground Level .....	6"
Weight .....	200 lbs

\*Engine Speed 3200 RPM

3000

The LC150 stump grinder features 12 replaceable carbide cutting teeth. Adjustable blade hydraulically lowers

to double as a Jack stand and depth gauge.

## TERRA RAKES

3000  
4100  
4200

	KR502	KR702
Overall Width	49"	70"
Overall Width w/ Extensions	69"	90"
Height	15"	15"
Length	29"	29"
Weight	240 lbs	290 lbs

3N  
Attachment

**Optional:** Hydraulic height adjustment link (shown), 10" wing extensions

The Terra Rake is designed to perform a variety of landscaping jobs. Can be mounted to the front or rear of the tractor with the Ventrac 3-N-1 adapter. Features include: Hydraulic angling and gauge wheels that can be mounted front, rear or removed.

## TILLER KL480

The KL480 Tiller is designed for easy preparation of gardens and yards. This power-driven front-end attachment allows the operator to easily monitor the tiller's performance. Skid shoe adjustments facilitate cutting depth. Twenty-four carbon tines are sequentially spaced to maximize performance.

Overall Width .....	53"
Working Width .....	48"
Length .....	41"
Height .....	17"
Weight .....	330 lbs



## TOUGH CUT MOWER HQ680

4100  
4200

Overall Width .....	68"
Cutting Heights.....	3", 3 5/8", 4 1/4"
Length .....	46"
Height .....	16"
Weight .....	310 lbs

The HQ680 Tough Cut Mower is designed for mowing high grass, thick weeds, and heavy brush. Three heavy-duty blades counter-rotate to cut and

drop materials evenly without windrowing. Tilt-up deck provides easy access to the blades.

## TRENCHER KY400

4100  
4200

Overall Height .....	30"
Overall Width .....	40"
Overall Length .....	67"
Trenching Width .....	5.5"
Trenching Depth .....	40"
Weight .....	470 lbs

The KY400 Trencher is capable of trenching up to 40 inches deep with a 5.5 inch-wide cut. Depth Indicator allows operator to gauge depth of cut from the tractor's seat.

**Standard features include:**

- Self adjusting crumb scraper
- Combo Terminator/Cup chain with replaceable carbide teeth.

## TURBINE BLOWER ET200

4100  
4200

Length .....	70"
Width .....	27"
Height .....	34"
Weight .....	250 lbs
MPH out of nozzle .....	125 MPH*
MPH out front of deflector .....	110 MPH*
Volume .....	10,750 CFM*

\*Engine Speed 3650 RPM

The ET200 Turbine Blower's front nozzle hydraulically rotates 360° continuously on a vertical plane. The front guard protects the nozzle while doubling as a deflector for blowing forward.




## V-BLADE KV550

3000  
4100  
4200

The V-Blade is ideal for sidewalk snow removal. Both wings can be independently angled hydraulically forward or back for greater control.

**Optional:** Wing Extensions.

Length .....	31"
Width Straight .....	55"
Width in Forward "V" .....	48.5"
Width in Backward "V" .....	48"
Height .....	21"
Weight .....	240 lbs
Wing Angle .....	30° each



# VERSA-LOADER KH500

## LOADER ATTACHMENTS



Mulch Bucket 9 cu. Ft.



Post Hole Digger /Fast Drive Motor



Boom Lift



Tine Forks



Tree Auger /Slow Drive Motor




Pallet Forks

Discover the versatility and ease of the KH500 Versa-Loader. Drive up and attach in minutes without tools or heavy lifting. Once connected, choose the standard bucket or six other optional attachments which also feature Ventrac's MINUTE MOUNT system to get the job DONE.



4100  
4200

KH500 w/standard Bucket (4000 SERIES)	
Overall Height on Tractor .....	67"
Overall Width .....	41"
Overall Length w/ Std Bucket .....	69"
Overall Length - Tractor, Loader, & Std Bucket .....	111"
Width of Std Bucket .....	48"
Capacity of Std Bucket (struck) .....	5 ft <sup>3</sup>
Weight without Tools .....	470 lbs
Lift Capacity including Tool .....	500 lbs
Lift Height (at Pivot Pins) .....	77"
Oil Tank Capacity .....	6 gal
Gallons/min at 3600RPM .....	9.5 GPM

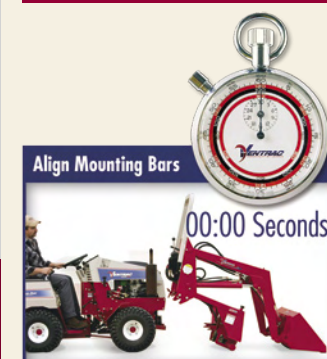

Align Mounting Bars

00:00 Seconds



Lock in Loader, Connect PTO

00:35 Seconds



Connection Complete

01:55 Seconds

# ATTACHMENTS